

TEKNİK ÖZELLİKLER VE STANDART DONANIM

- 15°, 22.5°, 30°, 45°, 67.5° için hızlı ayarlama tamponları
- Ara dereceler için tabla sabitleme kolu
- Profile göre kesme hızını ayarlama imkanı
- Emniyet switch'li muhafaza kapağı
- Testere dönüşü kayış tahrikli
- Çift el kumanda uygulaması
- Kolay testere değiştirme imkanı
- 2 x Pnömatik dikey piston
- 1 x Hava tabancası

ÖZEL DONANIM

- Alüminyum profil kesimi için hidrolik hız ayar
- Alüminyum kesimler için püskürtmeli soğutma sistem
- İstenilen ölçülerde rulolu konveyör




AC 550

TECHNICAL SPECIFICATIONS AND STANDARD ACCESSORIES

- Location points for 15° - 22.5° - 30° - 45° - 67.5°
- Fixing handle for locking at intermediate angles
- Adjustable cutting speed for different types of profile
- Saw covering with safety switch
- Belt propulsion saw
- Two hand safety operation
- Easy to change saw blade
- 2 x Pneumatic vertical piston with clamps
- 1 x Airgun

OPTIONAL EQUIPMENTS

- Hydrocheck - Hydraulic speed adjustment for aluminium profiles
- Cooling system for aluminium cutting
- Auxiliary conveyor with rulers

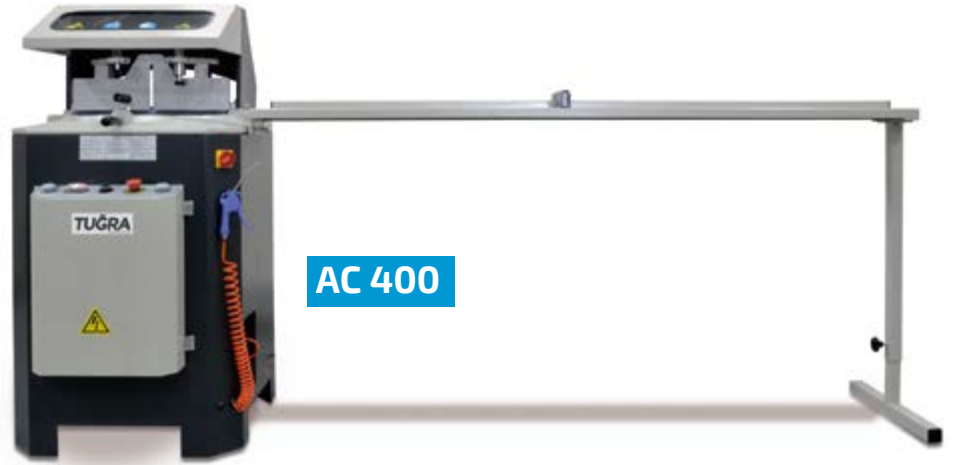

AC 400

	HP kW	n r.p.m	3~ Hz	I (400V) A	Ø D mm	Ø d mm	s mm	n r.p.m	45° w x h mm	90° w x h mm	45° w x h mm	90° w x h mm	6-8 bar		25 lt./min		l x w x h mm kg		l x w x h mm kg	
AC 550	4 3	3000 r.p.m	50	5,8 A	550 mm	32 mm	4 mm	3580 r.p.m	130x130 mm	155x155 mm	180x200 mm	260x200 mm					980x1130x1430 220kg	1000x1150x1450 250kg		
AC 500	4 3	3000 r.p.m	50	5,8 A	500 mm	32 mm	4 mm	3580 r.p.m	115x115 mm	155x155 mm	165x180 mm	230x180 mm					980x1130x1430 220kg	1000x1150x1450 250kg		
AC 450	3 2.2	3000 r.p.m	50	4,8 A	450 mm	32 mm	4 mm	3000 r.p.m	100x100 mm	120x120 mm	145x170 mm	210x170 mm					850x970x1370 180kg	1000x1150x1450 250kg		
AC 400	2 1,5	3000 r.p.m	50	3,3 A	400 mm	32 mm	4 mm	3000 r.p.m	100x100 mm	120x120 mm	130x80 mm	150x100 mm					720x760x1330 132 kg	740x780x1350 162 kg		